




IMPORTANT

Prevent overfilling and spilling!


If you have the BOROUX Legacy with Proactive™ Fluoride Filters

- Drain Lower Chamber (remember to close to the spigot before refilling)
- Fill to top of Foundation filters (2 filters: **2 gallons** | 4 filters: **1.5 gallons**)

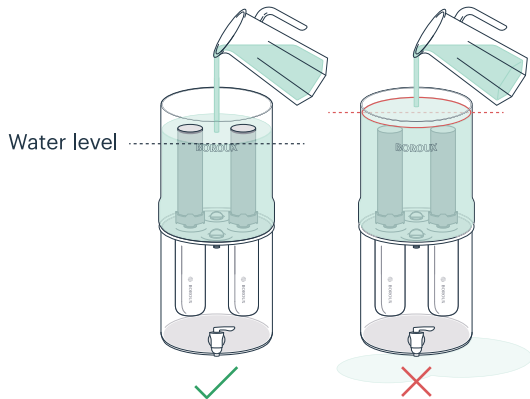

If you have the BOROUX Legacy Compact with Proactive™ Fluoride Filters

- Drain Lower Chamber (remember to close to the spigot before refilling)
- Fill to the **bottom of the BOROUX logo** (1 gallon)

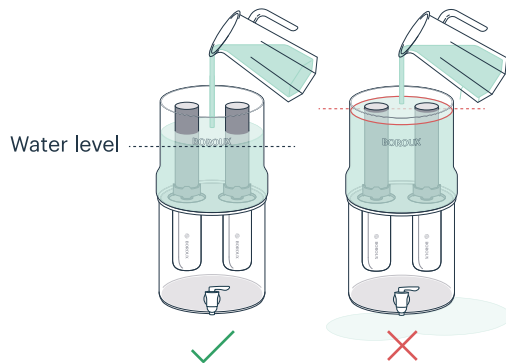

IMPORTANT: Always empty the lower chamber before refilling the upper one. Filling too soon will cause spills from the air vent between chambers.




IMPORTANT


Prevent overfilling and spilling!

Pro Tips


- Always ensure the lower chamber is empty before refilling to the specified level
- Look for leakage between the upper and lower chamber
 - This means the upper chamber was overfilled
- If using a non BOROUX system, reduce your upper chamber fill volume by ~40oz per pair of Proactive™ Fluoride Filters to avoid overfilling

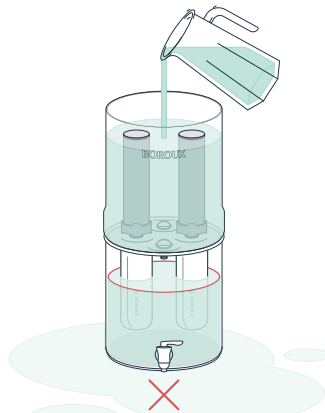

BOROUX Legacy

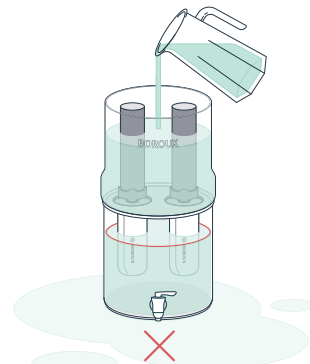

BOROUX Legacy Compact

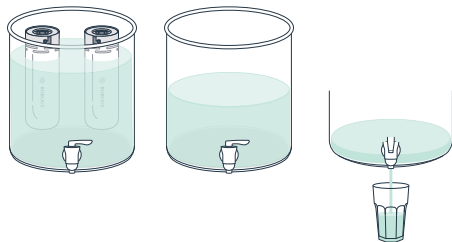

Need Help?

Scan the QR code
below or visit
boroux.com/refill-tips
for a 1-min video guide.

boroux.com