


6. Prime the Fluoride Filter (If Applicable)


a Prepare the Filter

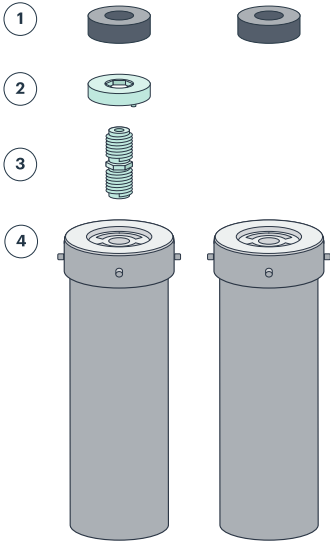


What's in the fluoride filters box?

1. Sealing Washers (2)
2. Blue Priming Washer
3. Blue Threaded Priming Adapter
4. Fluoride filters (2)

b Attach the Priming Adapter & Washer

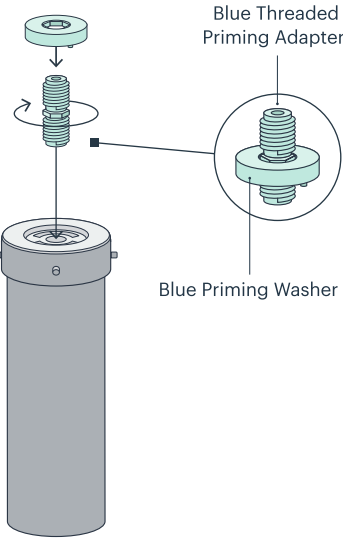


1. Thread the priming adapter into the fluoride filter. Hand tighten only.
2. Align the pins on the washer with the slots in the filter cap. At the same time, align the hex in the washer with the hex on the priming adapter.

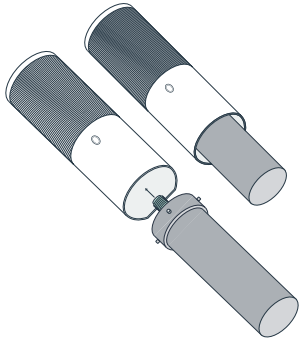


Follow the Same Priming Steps as the Foundation Filter.

c After Priming

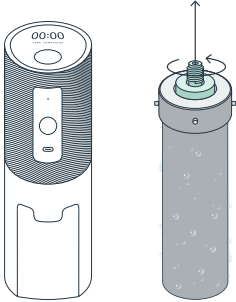


1. Remove the washer and priming adapter.
2. Repeat for all fluoride filters.


7. Storing Fluoride Filters (If Unused for Over a Week)



1. Attach to pump, drain water, let dry.
2. Place filters on a paper towel in a shaded area.

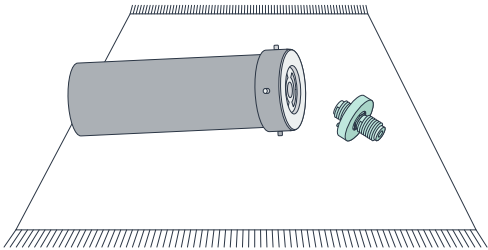

8. Store the Pump


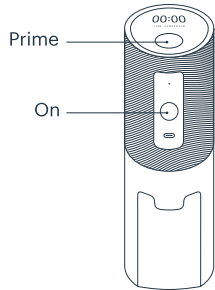


1. Hold over a sink.
2. Press "on" then press "Prime" to drain excess water.
3. Press "Prime" again to turn off.
4. Store in a dry place.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

For California residents


Quick Start Guide

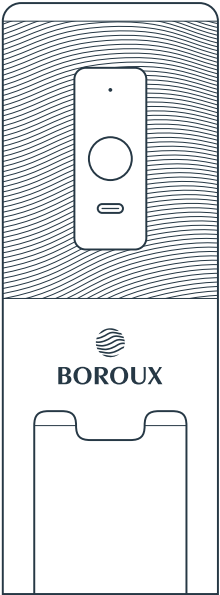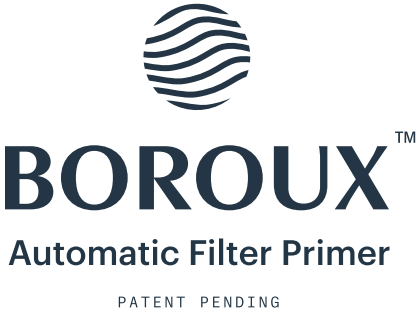


Want the full BOROUX experience? Scan for product support, or additional accessories.

1. Unbox & Check Kit Contents


1. Pump
2. Charging cable
3. Quick Start Guide

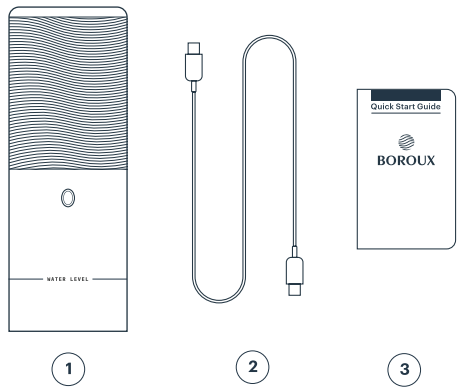


2. Features of the Priming Pump

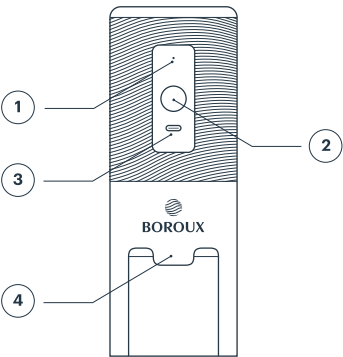

1. Battery charge indicator
2. On button
3. USB-C charging port
4. Hook for securing pump to chamber
5. Priming start button
6. Countdown timer
7. Sound Feedback
8. Water Outlet
9. Water Level Indicator

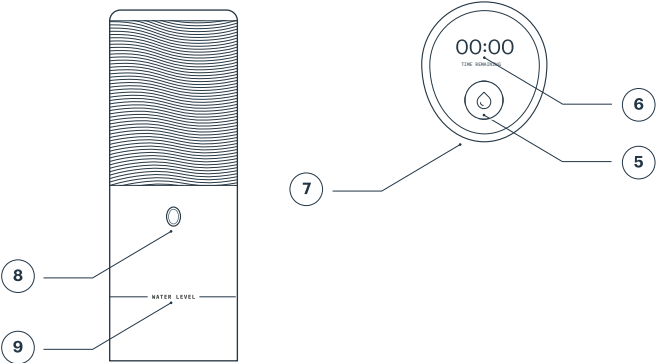


3. Charge the battery

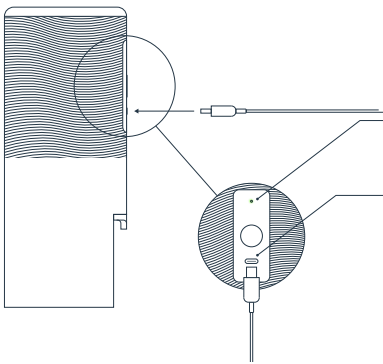

1. Plug the charging cable into the USB-C port.
2. Connect to a wall adapter.
3. Wait until the battery indicator turns green.
4. When charging is complete, replace the cover over the USB-C port.


4. Prime the Foundation Filter

a Prepare the Filter

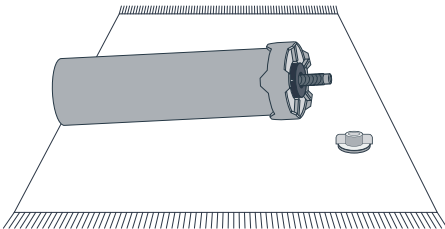


1. Remove from packaging and place on a towel.
2. Remove wing nut but leave washer in place.

b Attach the Filter to the Pump

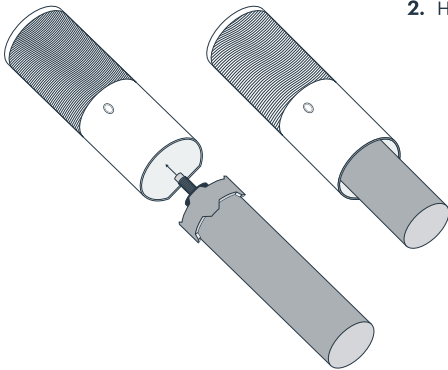

1. Rotate until snug (do not overtighten!).
2. Hand tighten only.


c Start Priming:

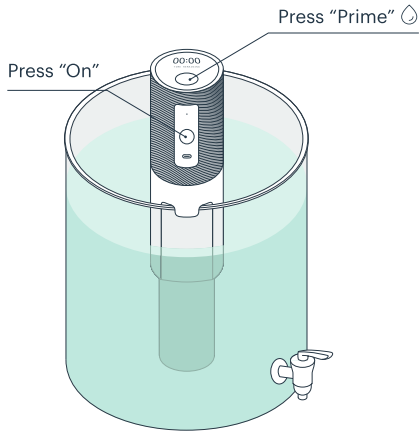

1. Place pump & filter in the lower chamber and hook it securely.
2. Fill with water to the indicated level.
3. Press "On" Press "Prime" to start.
4. Pump turns off automatically.

Note: Do not fully submerge the primer since it is not water proof.


d After Priming

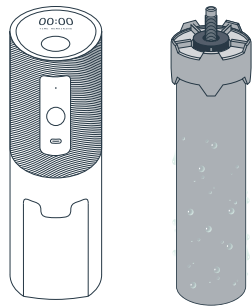

1. Remove the filter.
2. Check the washer (reattach if needed).
3. Repeat for all filters.

If the priming water isn't clear, re-prime the filter

5. Storing Foundation Filters (If Unused for Over a Week)

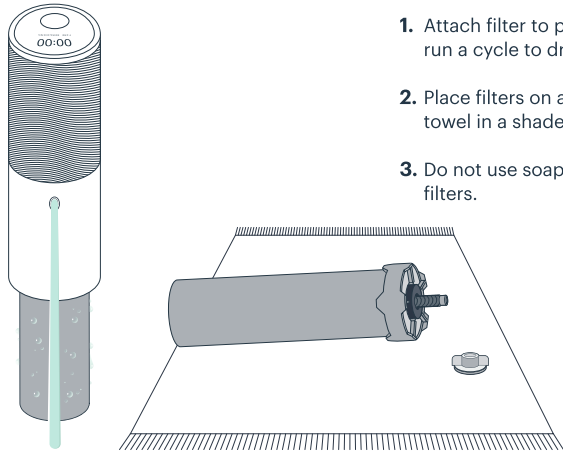

1. Attach filter to pump and run a cycle to drain water.
2. Place filters on a paper towel in a shaded area.
3. Do not use soap to clean filters.